


GT3BA Series 10 SEER 3 Phase Light Commercial High Efficiency Heat Pumps 10 SEER 3 – 5 Ton Capacity


The GT3BA Series of heat pumps offers exceptional performance from a small, compact package. The heat pump, when combined with our engineered coils or air handlers, offers a full line of quality, split system heating and cooling equipment. Units are ideally sized for slab or rooftop mounting in single, multifamily, and light commercial applications.

FEATURES and BENEFITS

- **Durable, Attractive Cabinet** – Designed using galvanized steel with a polyester urethane finish. The 950 hour salt spray finish resists corrosion 50% better than comparable units.
- **Copper Tube / Aluminum Fin Coils** – Both indoor and outdoor coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Full Service Valves** – These brass valves are easily accessible and simplify servicing of the refrigeration system.
- **Plastic Mesh Hail Guard** – A guard that will never rust protects the unit coil from being damaged by balls, lawnmowers, hail, etc.
- **Time / Temperature Defrost** – A reliable, industry standard control offers various time settings to meet any type climate.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Common Suction Service Port** – This port allows the contractor to read the suction pressure in all modes of operation without removing any panels, saving time and increasing serviceability.
- **2-1/2" Pedestal Base** – The sturdy base keeps the bottom of the coil out of harms way. Secondly, the base has weep holes along the edge to allow the water from the defrosting coil and rain to flow away from the unit.
- **Five Minute Restart Time Delay** – When the unit shuts down, a five minute delay keeps the unit from restarting, eliminating the highest cause for compressor failure.
- **Suction Accumulator and Crankcase Heat** – Protection from liquid flood back and future compressor failures.
- **Hot Gas Muffler** – Reduces compressor noise and vibration.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Warranty** – One year commercial parts warranty.

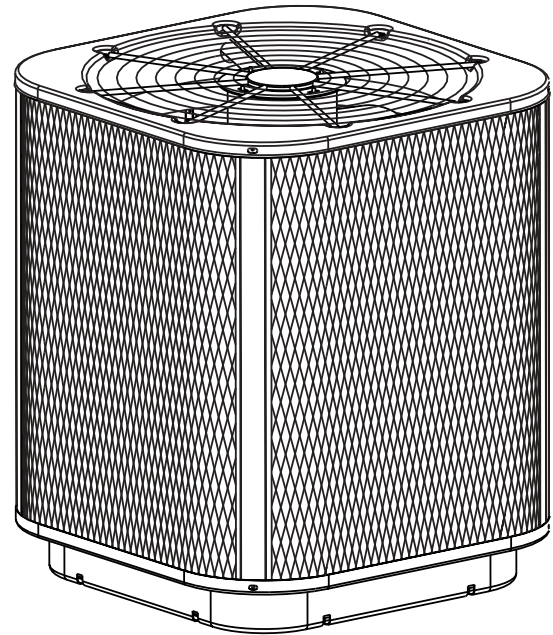


MODEL IDENTIFICATION CODES

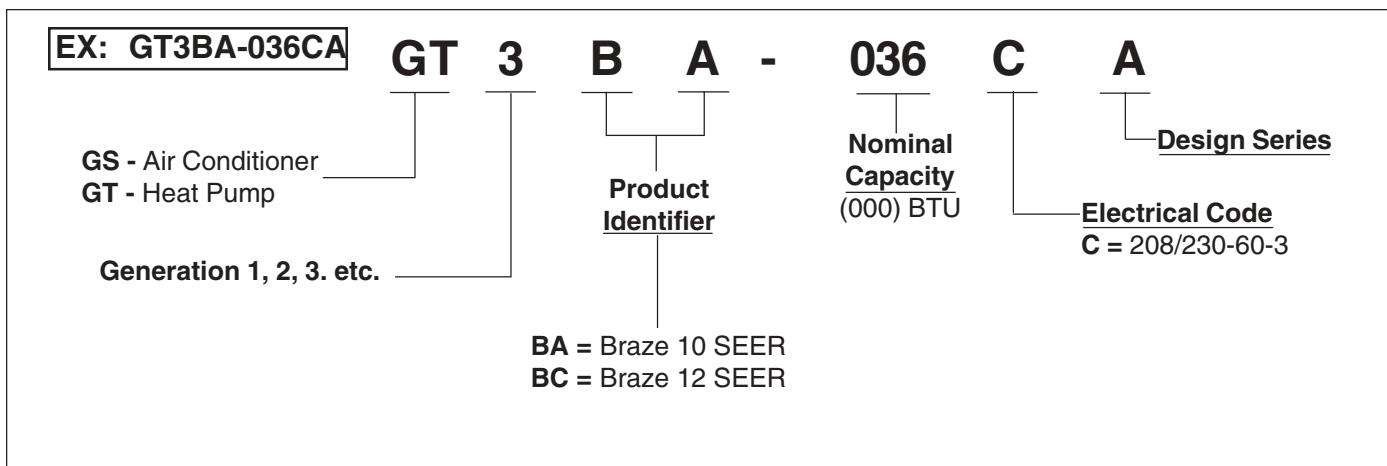

DIMENSIONS HEAT PUMP OUTDOOR SECTION

GT3BA-	036CA	048CA	060CA
H	34-1/2	30-1/2	42-1/2
W	22-1/2	30-1/2	30-1/2
D	22-1/2	30-1/2	30-1/2

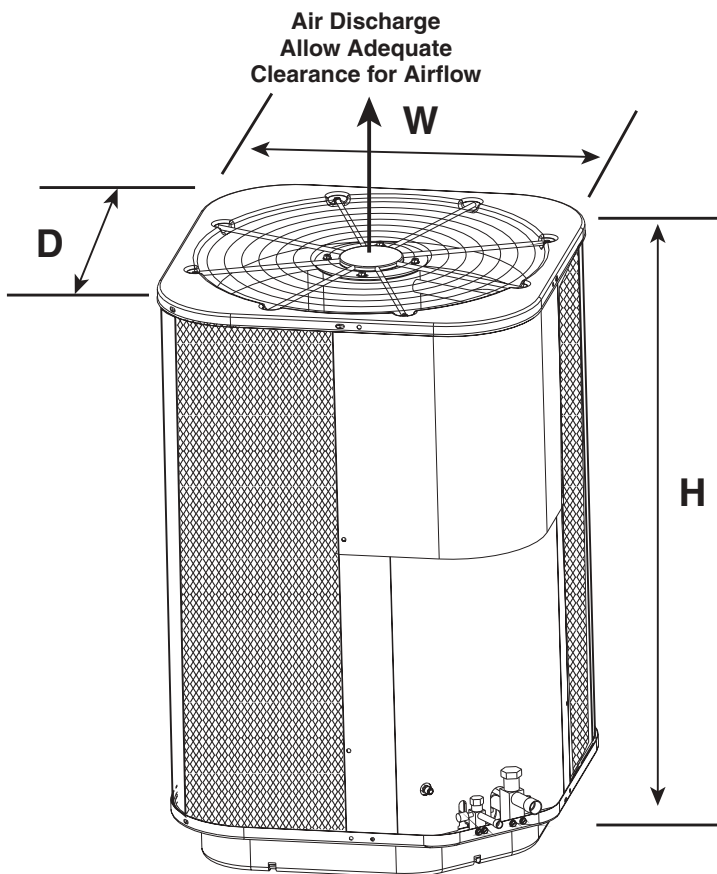

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

10 SEER — High Efficiency — Three Phase

Model No. GT3BA-		036CA	048CA	060CA	
Electrical Data	Volts-Cycles-Phase (1)		208/230-60-3	208/230-60-3	208/230-60-3
	Total Amps		11.4	14.3	16.9
	Delay Fuse Max. (2)		20	30	35
	Min. Circuit Ampacity		13.9	17.5	20.8
Component Data	Coil	Area	13.2	17.7	25.3
		Rows-FPI	1-18	1-18	1-18
		Tube Dia.	3/8 O.D.	3/8 O.D.	3/8 O.D.
	Fan Motor	Type	PSC	PSC	PSC
		Amps	1.1	1.5	1.5
		Watts-HP	210-1/8	300-1/4	300-1/4
	Fan Blade	Dia.-#Blades	18 in.-3	24 in.-3	24 in.-3
		SCFM	2500	4000	4000
	Compressor Data*	RLA	10.2	12.8	15.4
		LRA	75	91	124
Refrigerant Suction Line-Length/O.D. (Liq. Line All Lengths - 3/8" O.D.)		0-24 ft.	3/4"	7/8"	7/8"
		25-39 ft.	3/4"	7/8"	1-1/8" (5)
		40-75 ft.	7/8" (4)	7/8"	1-1/8" (5)
Refrigerant Charge (Outdoor unit, Indoor Unit, 15' Line Set)		R-22 Ounces	95	134	198
Weight Approximate (lbs.)	Net		151	174	200
	Ship		163	186	212

* Values shown are most severe and may vary slightly depending on the make of the compressor supplied.

(1) Operating Voltage Range: 198v min. — 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 3/4" to 5/8" reducer from unit to line.

(4) Requires 7/8" to 3/4" reducer from line to unit.

(5) Requires 7/8" to 1-1/8" reducer from line to unit.

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit
200	150	100	50	Ampacity
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

SYSTEM HEATING & COOLING CAPACITIES

10 SEER — High Efficiency — Single Phase

Outdoor Unit	With This Coil							
Model Number	Coil	Cooling Btuh	SEER	Heating Btuh @ 47	Heating Btuh @ 17	HSPF	Nominal CFM	Required Orifice Size
GT3BA-036CA	C3BA-036C/U-A (3)	34,200	10.0	33,600	17,400	7.0	1200	.071 (2)
GT3BA-036CA	C3BA-036C/U-B (3)	34,600	10.0	34,000	17,600	7.2	1350	.071 (2)
GT3BA-048CA	C3BA-048C/U-B (3)	46,000	10.0	46,500	26,000	7.2	1550	.082 (2)
GT3BA-048CA	C3BA-048C/U-C	46,500	10.0	46,500	26,000	7.2	1600	.082 (2)
GT3BA-060CA	C3BA-060C/U-C (3)	56,500	10.0	57,000	35,000	7.2	1850	.087 (2)

Outdoor Unit	With This Air Handler							
Model Number	Air Handler	Cooling Btuh	SEER	Heating Btuh @ 47	Heating Btuh @ 17	HSPF	Nominal CFM	Required Orifice Size
GT3BA-036CA	GB3BM/V-036K-B	34,600	10.0	34,000	17,600	7.2	1350	.071 (1)
GT3BA-048CA	GB3BM/V-048K-B	46,000	10.0	46,500	26,000	7.2	1550	.082 (1)
GT3BA-060CA	GB3BM/V-060K-C	56,500	10.0	57,000	35,000	7.2	1850	.087 (1)

(1) Supplied with indoor section

(2) Field supplied

(3) Also available as C3BH Horizontal Case Coil

ACCESSORIES - Condensing Unit

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Outdoor Thermostat - 913852

Two stage logic provides ability to lock out electric strips down to balance point.

Snow Stand

Plastic-coated, molded wire stand which elevates units 7-1/4" above ground level.

913144 - (018 through 042) Shipped six (6) per box.

913145 - (048 through 060) Shipped six (6) per box.

